


DIMENSIONS

	Capacity	A	B	C	D
SH-20	20	20' - 0"	7' - 0"	4' - 10"	4' - 0"
SH-30	30	20' - 0"	7' - 0"	5' - 10"	5' - 0"
SH-40	40	20' - 0"	7' - 0"	8' - 0"	7' - 4"
SH-50	50	24' - 0"	7' - 0"	8' - 2"	7' - 4"

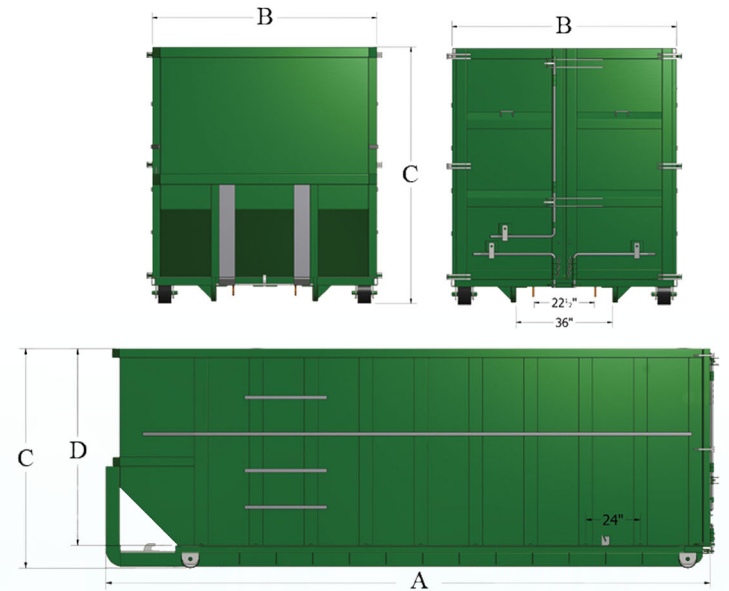

STANDARD ELECTRICAL FEATURES

- ▶ UL/CSA Approved Design
- ▶ Meets/exceeds OSHA regulations
- ▶ PLC "flex-design" based control systems
- ▶ NEMA 4 rated enclosure
- ▶ Internal timers prevent system run-on
- ▶ 24-volt controls
- ▶ Adjustable multi-cycle timer
- ▶ 75% and 100% full light
- ▶ Heavy duty oil-tight pushbutton controls
- ▶ Key lockable start pushbutton

HYDRAULIC SYSTEM UPGRADES

- ▶ Single phase and three phase power units
- ▶ Hi-lo hydraulic pumps
- ▶ Regen circuit
- ▶ Oil cooler
- ▶ Bio-degradable oil
- ▶ In tank oil heater
- ▶ Low temperature oil (as low as -60 Celsius available)

ELECTRICAL SYSTEM UPGRADES

- ▶ System monitor
- ▶ Remote start/stop station
- ▶ Auto-start system (photo-eye or sonic sensor)
- ▶ Wireless remote control
- ▶ Biometric interface
- ▶ HMI based operator interface

COMPACTOR UPGRADES

- ▶ Custom chute systems
- ▶ Custom weather enclosures
- ▶ Drive-on deck systems (certified up to 20,000 lbs.)
- ▶ Tongue and grooved floor designs
- ▶ AR plate floors and sides
- ▶ Custom hydraulic cart tipping systems
- ▶ Custom steel safety barriers
- ▶ Custom hydraulic lift systems

This Equipment is
UL/CSA Approved and
Conforms to all Current
ANSI Z245.2 Safety
Standards

In order to provide the most currently
engineered and designed equipment,
we reserve the right to change
specifications without notice. This
brochure is intended to provide
information only, and should not be
used in an arbitrary manner to judge
equipment for any particular purpose.

